



RESISTANT
BUILDING PRODUCTS LTD

Uniclass	L5142		
CI/SfB		Rr9	



Magnesium Oxide
Building Board
Trading Association



F.T.M.R.C.

STAV
ASSUREGOLD



multi - rend

Multi-Rend Board

What is it?

Resistant Multi-Rend is a high strength external render carrier board suitable for any location across the British Isles. It is a vapour permeable, A1 Non-combustible building board with excellent dimensional stability. Multi-Rend is moisture, frost, mould and impact resistant. It offers an alternative to block and render, brick, masonry or cladding finish.

Available in either 9 or 12mm for selection with thin or thicker coat render finishes

Where and when is it used?

To form the external facades of domestic and commercial projects which utilise timber, steel or hybrid framed structures to achieve lightweight, fast erect, thermally efficient building envelopes with smaller footprints.

Multi-Rend's unique characteristics

- A1 Non-combustible
- Breathable
- Low thermal expansion
- Low moisture expansion
- High strength to thickness ratio
- Lightweight
- Easy cut - Score & Snap
- Impact resistant - in accordance with ISO 7892
- Keyed Surface
- Both 9 & 12mm Multi-Rend can be bent at an 8m Radius curve (studs maximum 300mm c/c)

Multi-Rend board must be fully dry throughout before applying a final finish. Use a wire brush to remove any loose particles / dust to provide a good keyed surface ready for the render system.

Finish

Resistant Multi-Rend has been approved as a substrate to accept an extensive range of finishes, see below:

- Mineral based renders including dash
- Acrylic / Silicone / Polymer modified renders
- Solvent based renders
- Lime Renders - Thorough consideration, specification & application required
- Brick slips, stone cladding, natural thin cut marble.

Approving Render Companies

Render suppliers named below have extensively tested and approved Multi-Rend as a suitable substrate. Please contact the render supplier for relevant specification which will include board preparation advice which may differ from one supplier to another. If a render other than listed below is chosen the applicator should test to completely satisfy compatibility before deciding to proceed.





Multi-rend board must be dry, clean & free from dust etc before a render is applied to the board

Fitting Design Guidance

Multi-Rend Construction for Timber & Steel Frame Batten Fixing Guide

Multi-Rend can be either fixed onto timber battens or hot dipped galvanised steel battens.

Timber Battens

Kiln dried treated timber battens to be used.

Battens to be less than 20% moisture content before installation of Multi-Rend.

Vertical battens - located at maximum 600mm vertical centres.

Typical Fixing Centres

-Board to be fixed at 300mm vertical centres with 600mm batten centres.

-Board to be fixed at 400mm vertical centres with 400mm batten centres.


All to batten engineers design specification

Edge fixing - all fixings should be located at a minimum of 15mm from the edge of the boards. Fixing type - see recommended accessory page.

Notes

Timber Frame

Timber vertical fixing battens must be fixed back to a timber stud of the structure and not just fixed to the sheathing board.

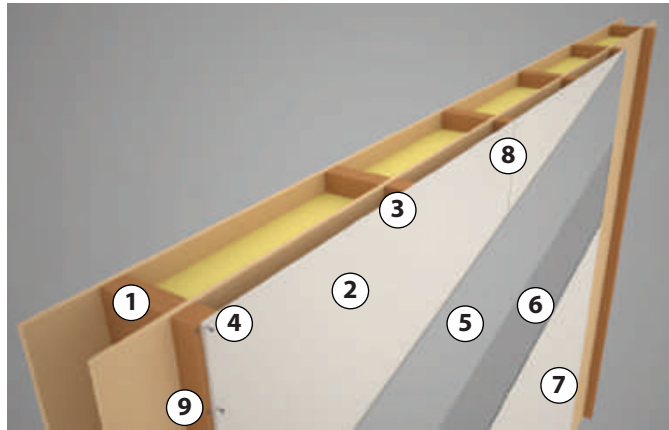

Key

1. Timber Frame
2. 9 or 12mm Multi-Rend Board (Keyed Surface Outwards)
3. Batten size to suit project design as specified by engineer on project.
4. Multi-Rend Fixings (minimum of 15mm from edge of board)
5. Base Coat
6. Mesh
7. Render
8. 4mm gap is a fitting gap between boards horizontal & vertical.
9. Batten fixing size as specified by project engineer.

Steel Battens

Hot dipped, galvanised steel are manufactured using dx51/140g material that is manufactured to BS EN 10143-2009.

Dimensions - minimum 75mm face x 25mm deep.

Vertical battens - located at 400mm or 600mm centres.

Typical fixing centres

-Board to be fixed at 300mm vertical centres with 600mm batten centres.

-Board to be fixed at 400mm vertical centres with 400mm batten centres.


All to batten engineers design specification

Edge fixing - all fixings should be located at a minimum of 15mm from the edge of the boards. Fixing type - see recommended accessory page.

Notes

Steel Frame

Steel vertical fixing battens must be fixed into solid members behind the insulation.

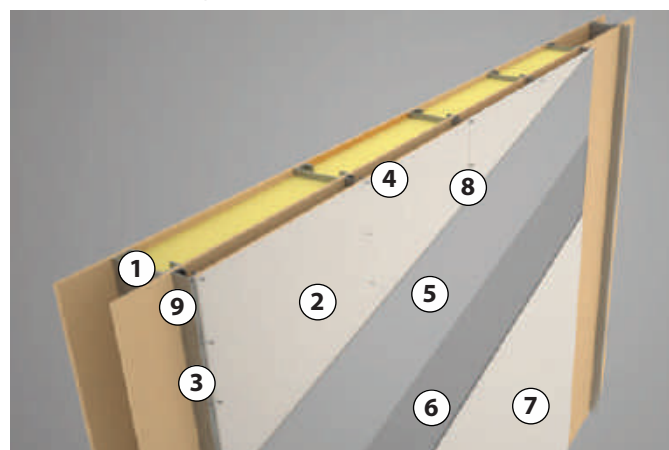

Key

1. Steel Frame
2. 9 or 12mm Multi-Rend Board (Keyed Surface Outwards)
3. Batten size to suit project design as specified by engineer on project.
4. Multi-Rend Fixings (minimum of 15mm from edge of board)
5. Base Coat
6. Mesh
7. Render
8. 4mm gap is a fitting gap between boards horizontal & vertical.
9. Batten fixing size as specified by project engineer.

Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Approved Fixing Information



Timber Stud

Wood Screw
Self Tapping
Countersunk head
Stainless Steel



Steel Stud

Case hardened
Self Tapping
Countersunk head
Stainless Steel

Multi-Rend fixings into Timber Battens

Assumptions

Maximum unfactored weight of render system = **15kg/sq.m**

Weight of 12mm Multi-Rend Board = **12.6 kg/sq.m**

Axial withdrawal resistance of fixings based on **10mm dia** screw head in **1050kg/m³**

Multi-Rend board - derived by calculation to CI 8.7.2 EC5

Shear resistance in timber assumes **30mm** pointside penetration in timber batten of grade C16 in service class SC2

Fixing type: **Bi-Metal Drywall Screws (BMDW)4.8 x 42mm (or equivalent)**

Wind load resistance of fixings

Batten/Stud Spacing	Screw spacing	Design windresistance* (Nm ⁻²)
600	200	3100
	300	2000
	400	1500
	600	900
400	200	4700
	300	3100
	400	2300
	600	1500

Multi-Rend fixings into Steel

Assumptions

Maximum unfactored weight of render system = **15kg/sq.m**

Weight of 12mm Multi-Rend Board = **12.6 kg/sq.m**

Head pull-through resistance of fixings based on theoretical values assuming min 10mm dia screw head in 1050kg/m³ Multi-Rend board to CI 8.7.2 EC5

Shear resistances in board material calculated in accordance with CI 8.2.3 EC5 in service class SC2 and is based on the following screw parameters derived in accordance with EC5 CI 8.3.1.

Characteristic fastener yield moment = 3704 Nmm

Characteristic fastener embedment strength in Multi-Rend Board = 30.4 N/sq.mm



Fixing type: **Bi-Metal Drywall Screws (BMDW)4.8 x 42mm (or equivalent)**

Wind load resistance of fixings

Batten/Stud Spacing	Screw spacing	Design windresistance* (Nm ⁻²)
600	200	2900
	300	1850
	400	1350
	600	750
400	200	4400
	300	2900
	400	2150
	600	1350

Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Staggering boards at corners

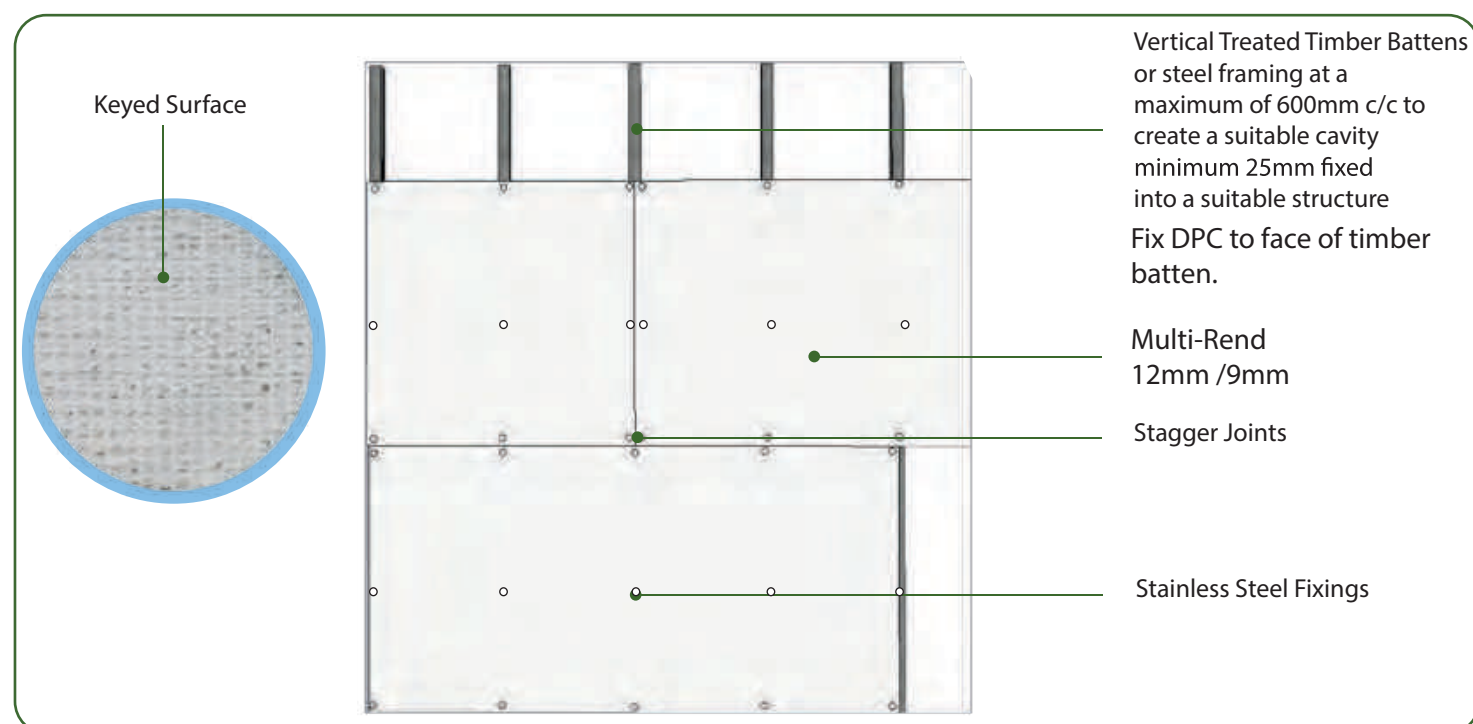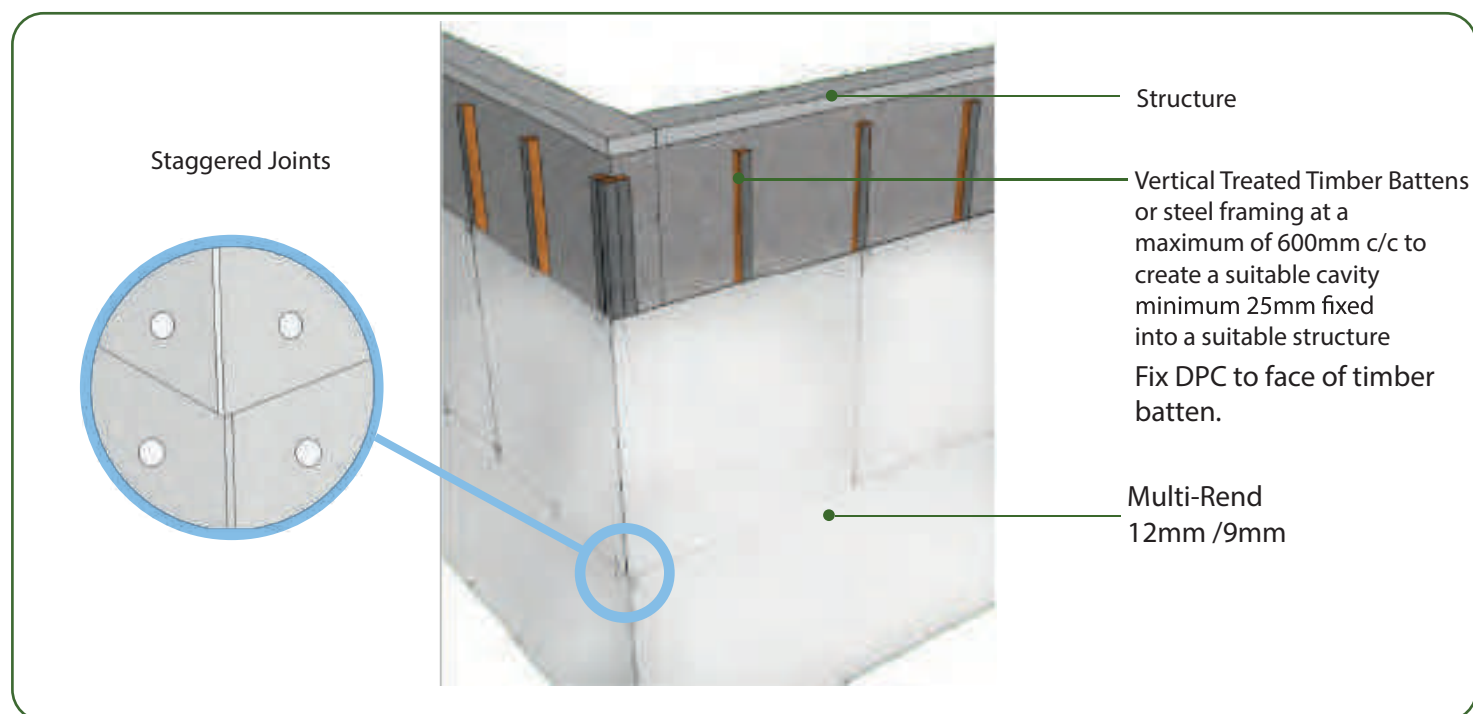

Multi-Rend boards must be fitted horizontally to create a brick bond effect. This will stagger joints and increase the strength of the overall boards. If fixed at 300mm centres 27 fixings per board will be required.

Cutting Multi-Rend

Multi-Rend can be cut by simply using a stanley knife and the 'score and snap' method. This is adequate for low volume work. For high volume work we can recommend using a stone disc/blade or a Tungsten Carbide blade.

The board is to be fitted keyed surface outwards


PPE

We recommend that adequate personal protective equipment is used at all times when installing Multi-Rend.


Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Construction Details

Fitting Gap around boards detail

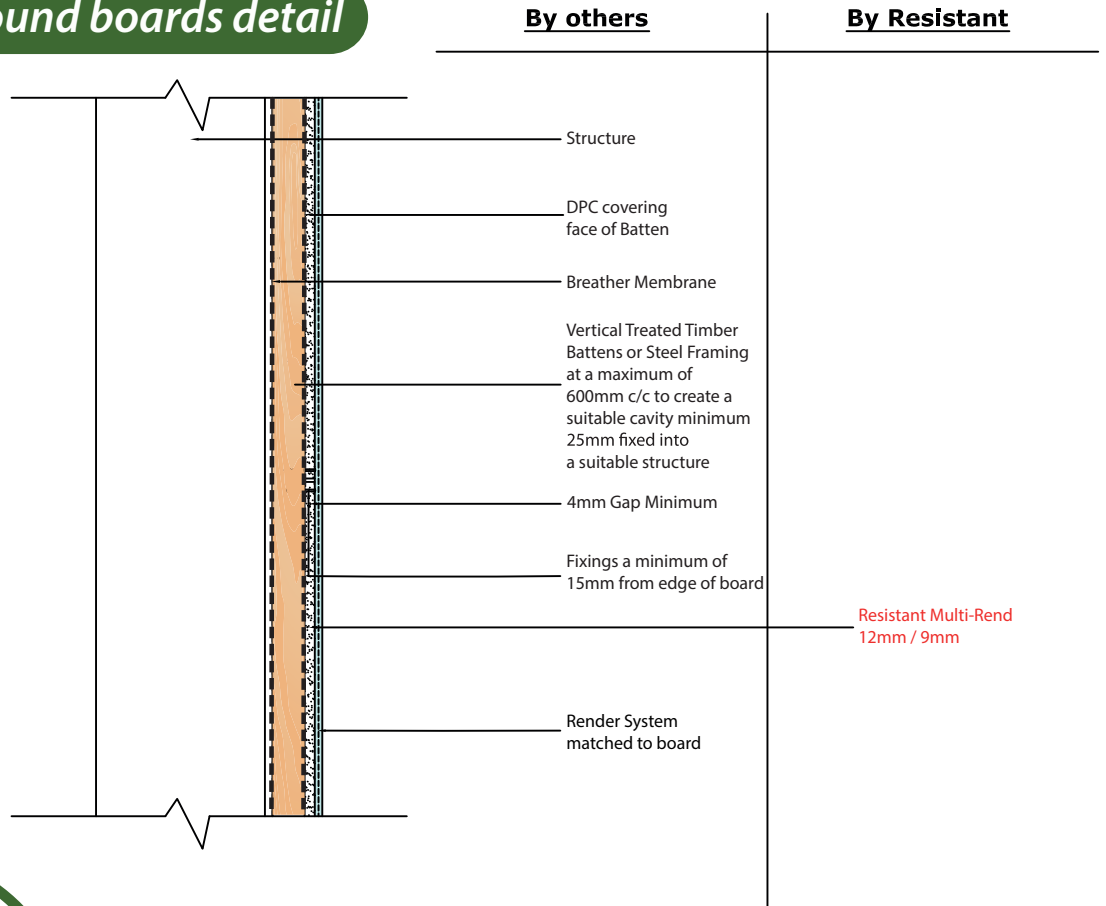


Please Note
The Fitting Gap between the boards to be prepared and reinforced as per approved render suppliers specification

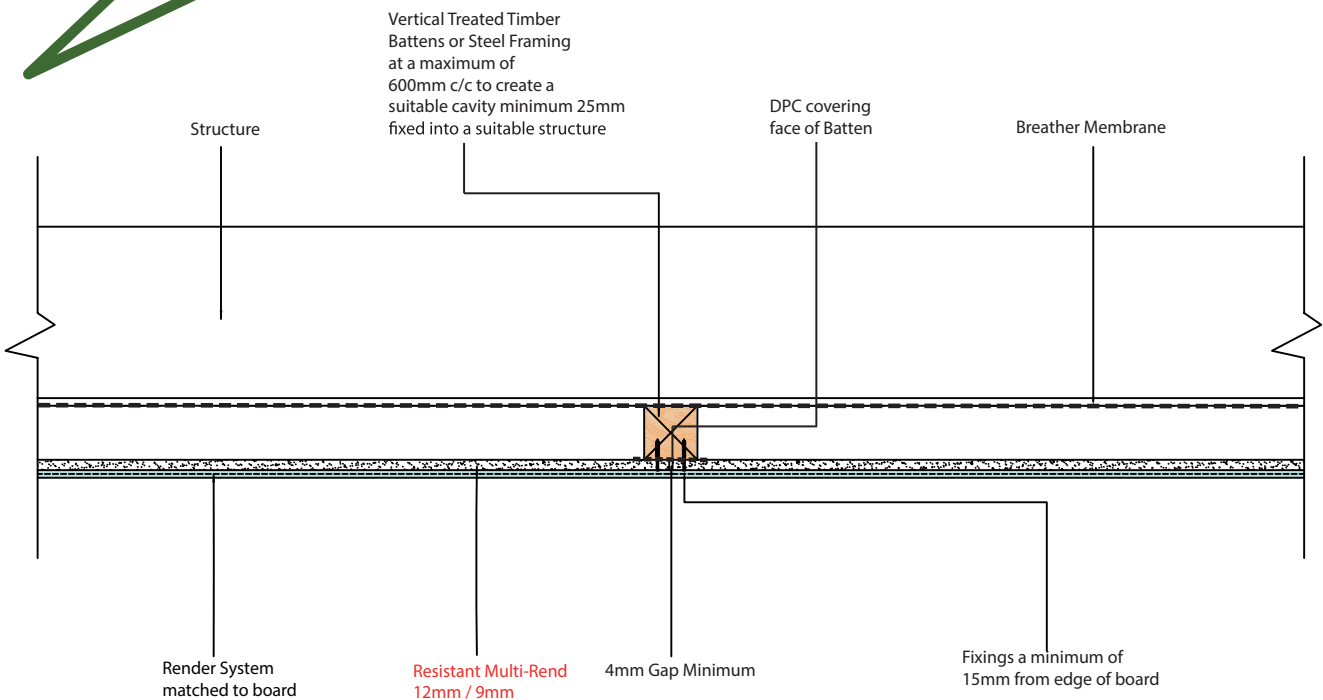


Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Internal Corner Detail

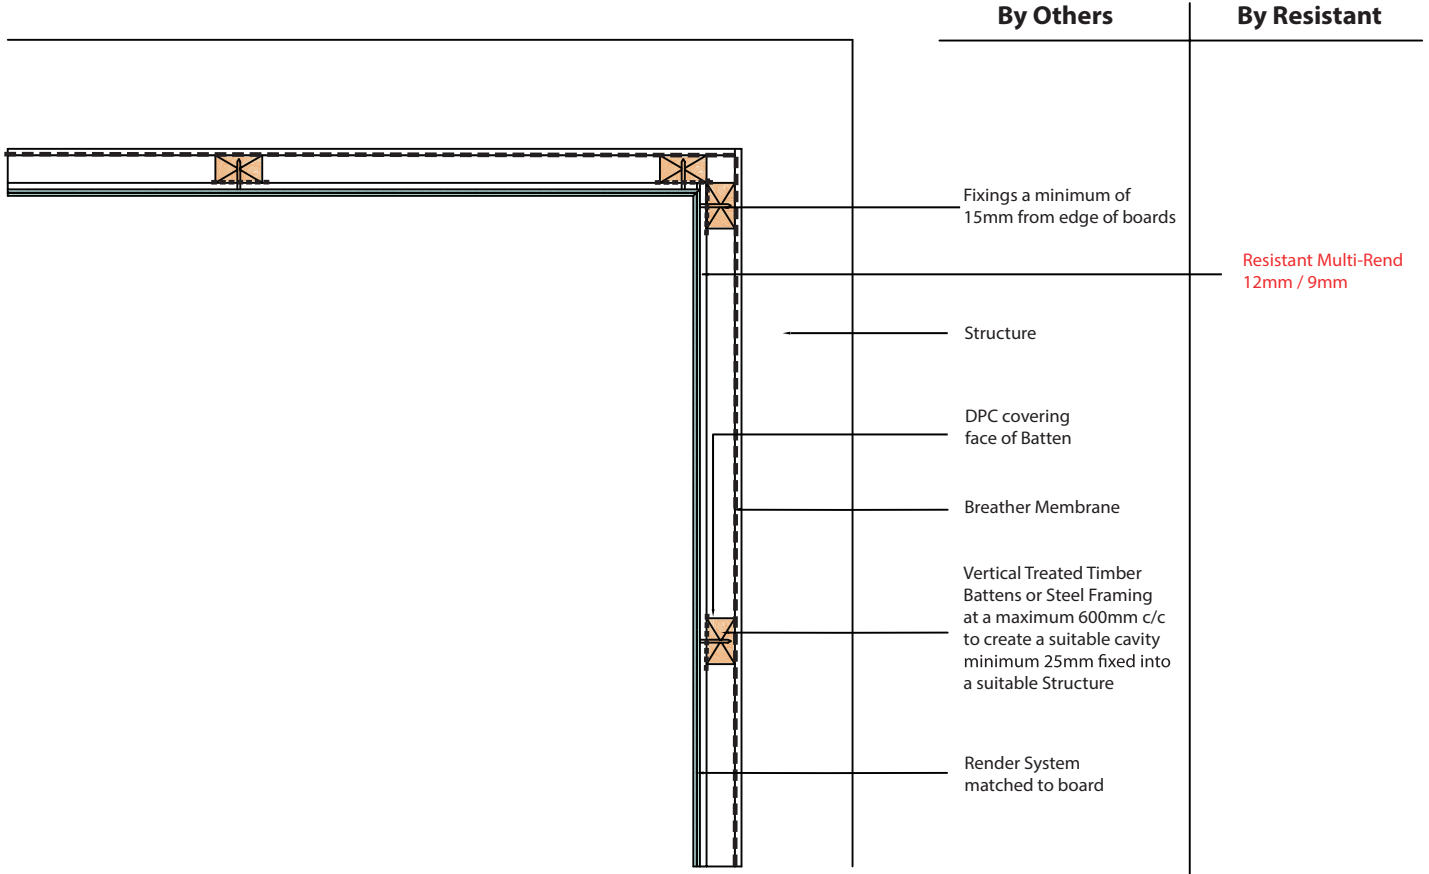


External Corner Detail

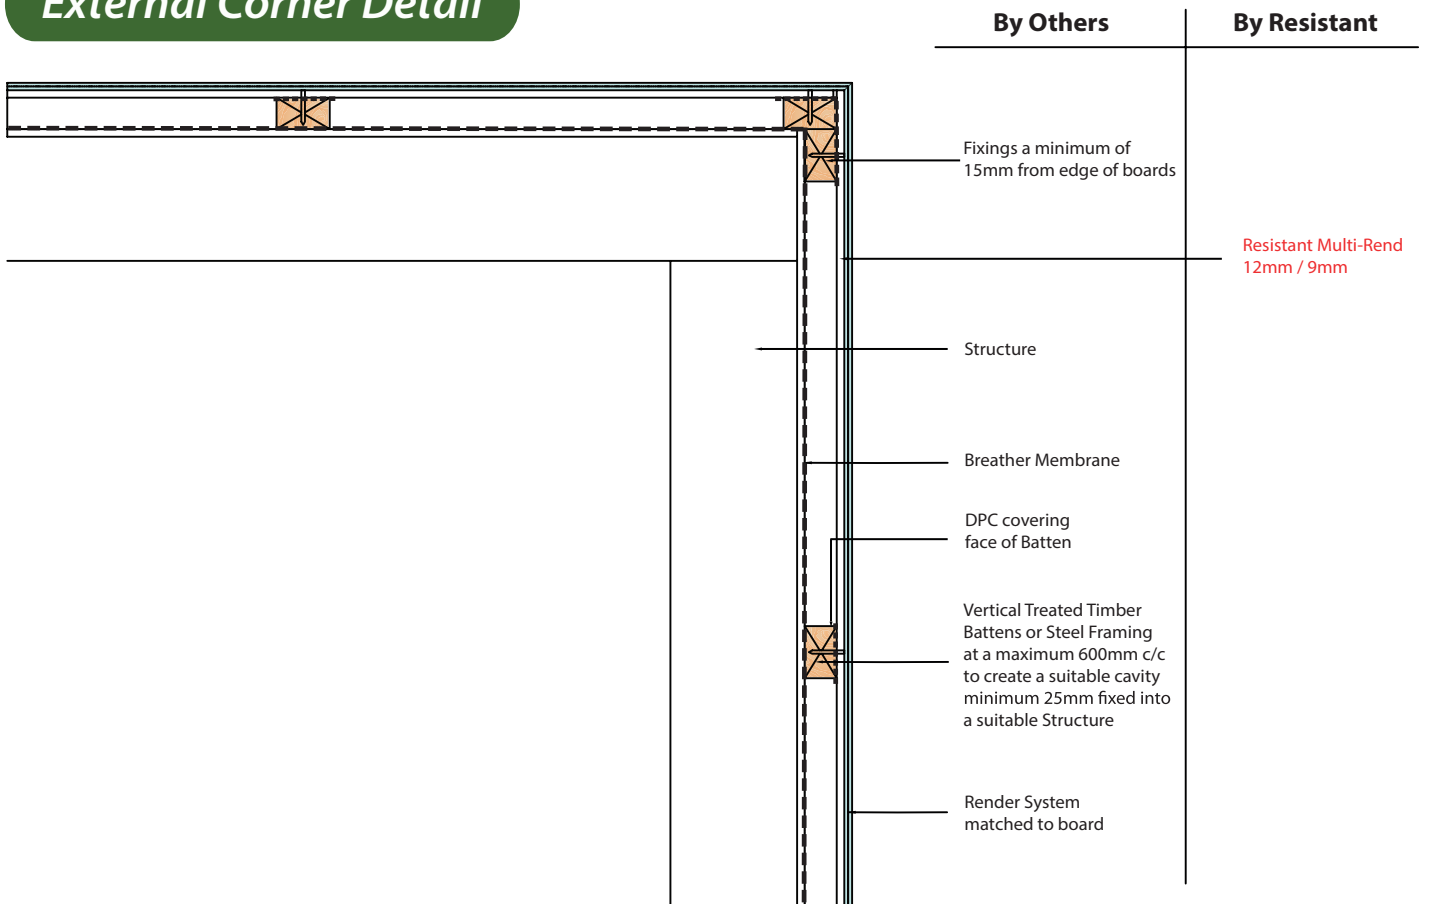


Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Eaves Detail

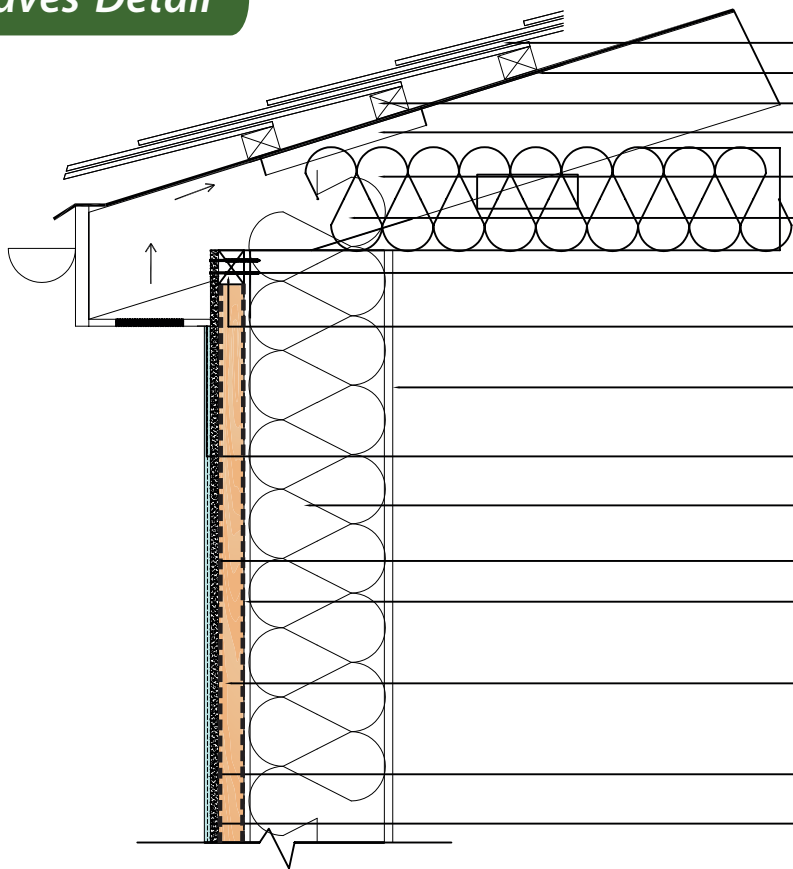

By Others	By Resistant
Roof Tiles	
Roof Membrane	
Roof Batten	
Ventilation Spacer	
Rafter	
Insulation between roof joists	
Fixings a minimum of 15mm from edge of boards	
Ventilated Cavity Closure	
Internal Finishing Board	
Stop Bead	
Structure	
DPC covering face of Batten	
Breather Membrane	
Vertical Treated Timber Battens or Steel Framing at a maximum 600mm c/c to create a suitable cavity minimum 25mm fixed into a suitable Structure	
Render System matched to board	Resistant Multi-Rend 12mm / 9mm


Base Formation Detail

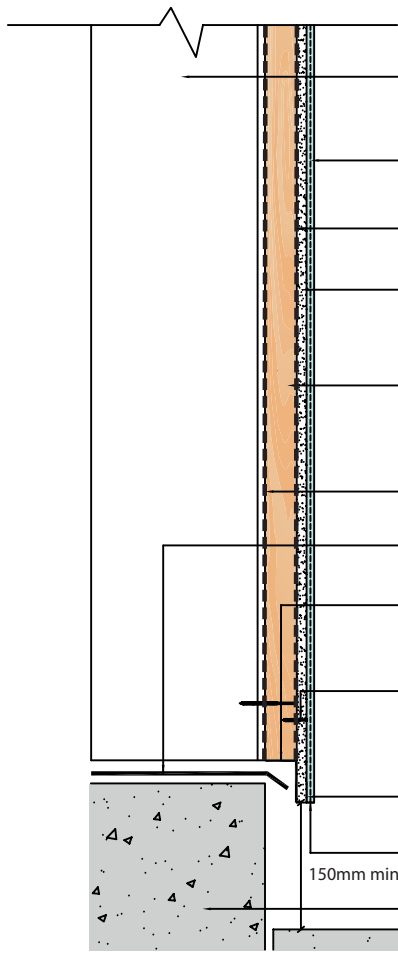


By Others	By Resistant
Structure	
Render System matched to board	
DPC covering face of batten	
Vertical Treated Timber Battens or Steel Framing at a maximum 600mm c/c to create a suitable cavity minimum 25mm fixed into a suitable structure	Resistant Multi-Rend 12mm / 9mm
Breather Membrane	
DPC	
Ventilation Strip with Insect Mesh	
Fixings a minimum of 15mm from edge of boards	
Multi-Rend and Render with a 10mm Overhang	
Stop Bead	
150mm minimum	
Foundations	
Ground Level	

Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Window Reveal (Upper and Lower)

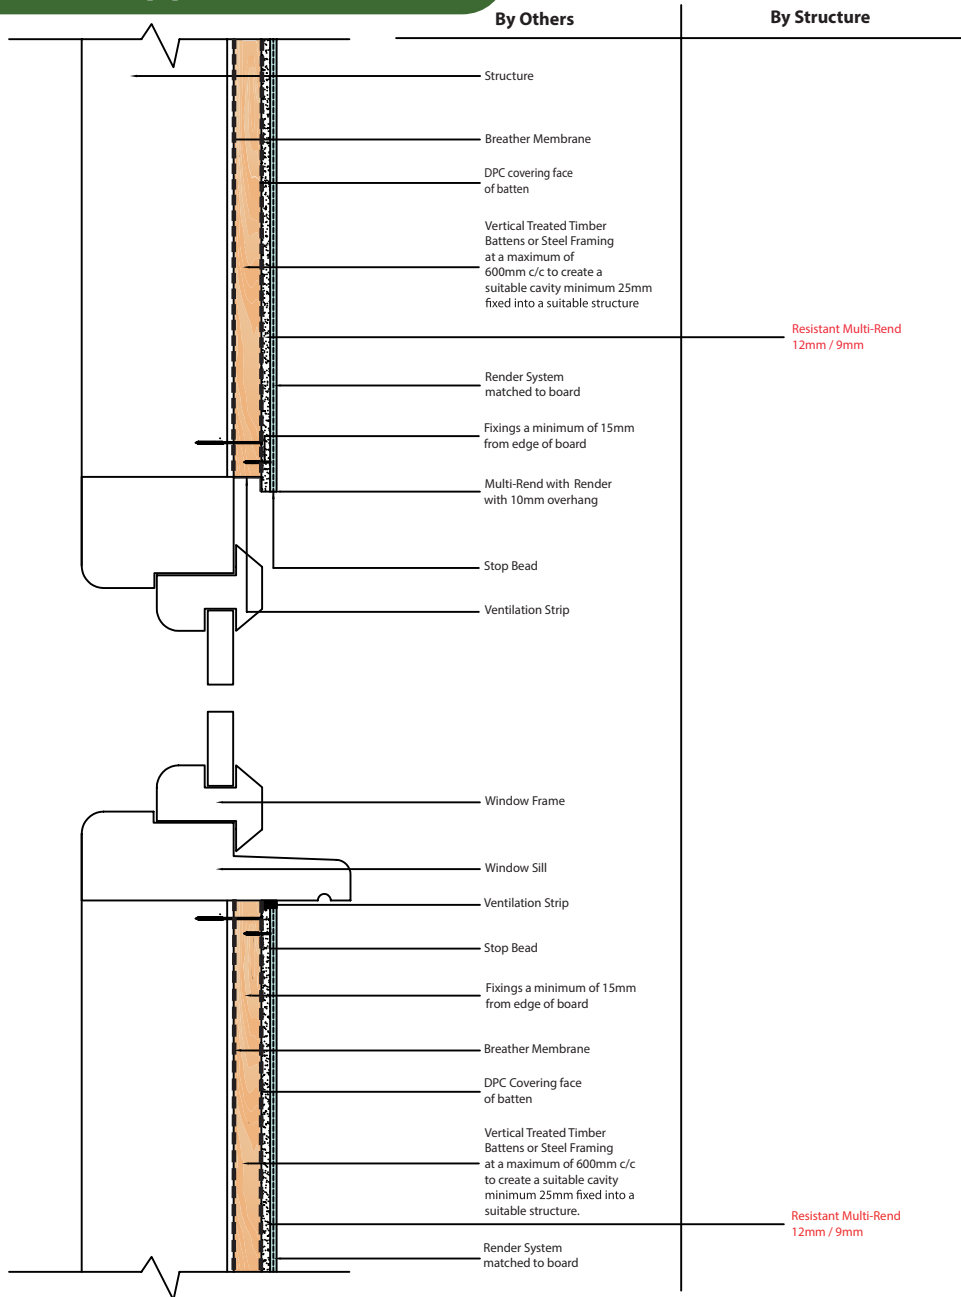


Window Jamb Detail

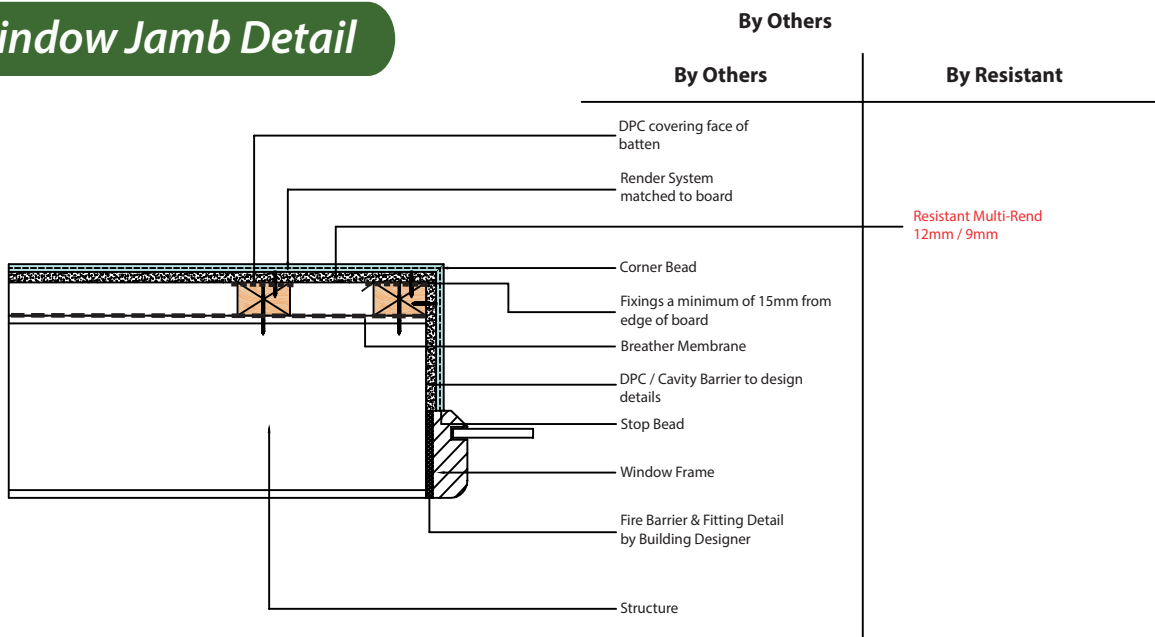


Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Dormer Window Detail

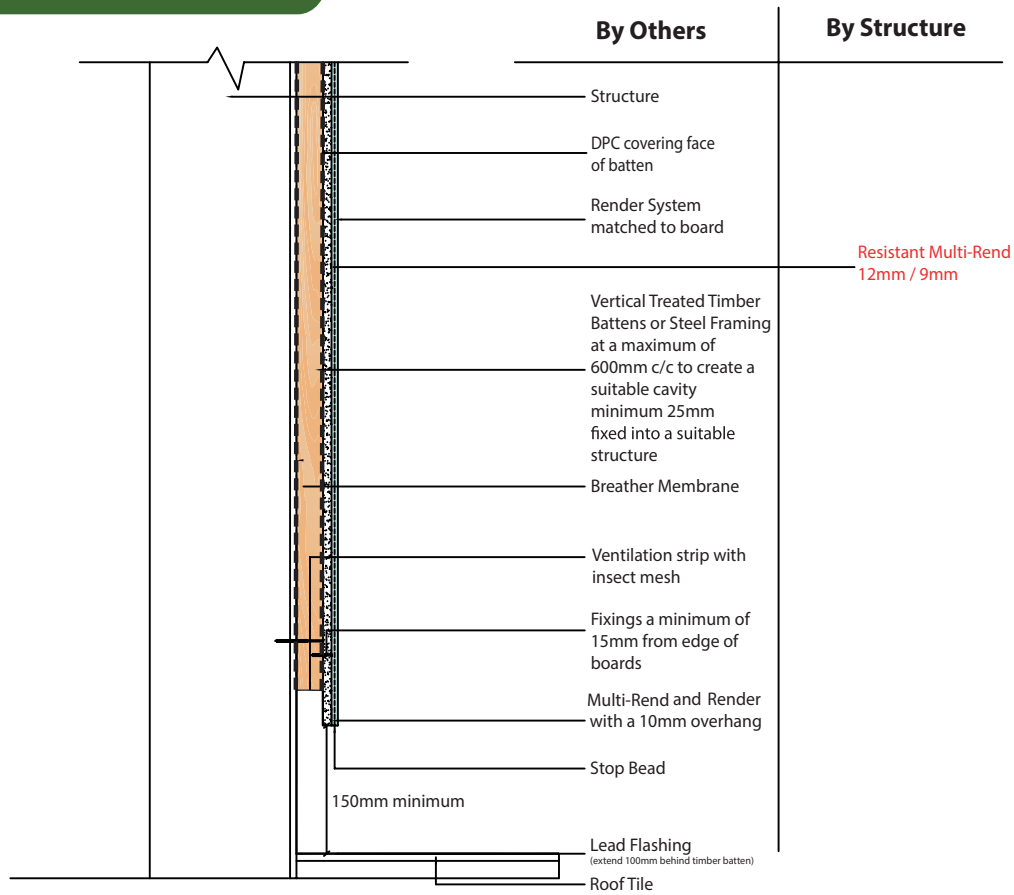

Horizontal Compression Joint

Please note
Architectural design consideration must be given to ensure any anticipated settlement of building structure will be reflected in detailing of external facade and may require the introduction of compression joints at mid floor zones and where different cladding types abut.

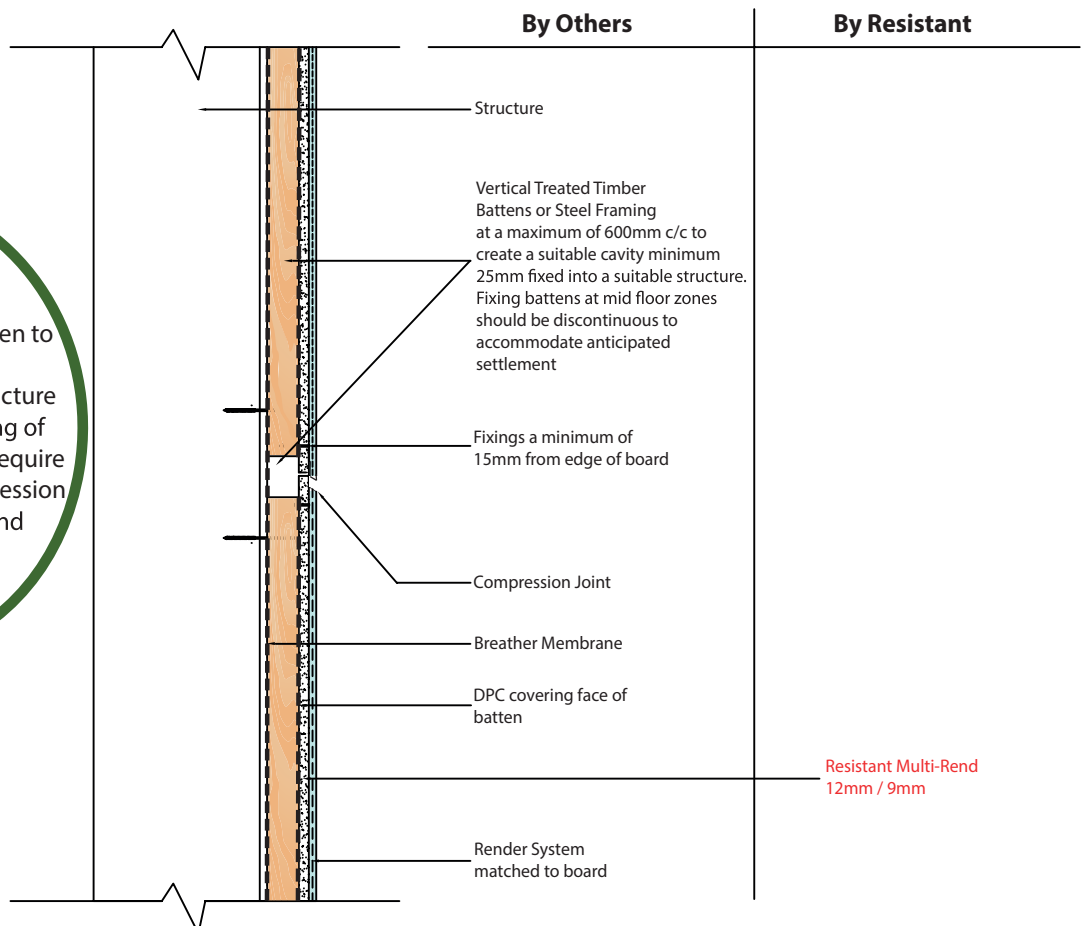

Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Responsibility List

Resistant Fixing Design Guide	Render Company	Building Designer	Batten Engineer
Resistant Fixing Information	Render Specification	Structural Frame Fixing Limitations	Information to batten engineer for fixing diameter size & centres
	Board Preparation	Render Specification	Information to batten engineer for batten arrangement and structural design
		A) Cavity size & Details B) Cavity Barrier Location & type - by others C) Movement joints	Information to batten engineer for batten fixing design

Building Project Manager Checklist

Is the Multi-Rend Board fully dry throughout and free from dust & debris etc before applying Render Finish?	✓
Is the Structure designed to withstand weight of Multi-Rend and render?	✓
Are the battens kiln dried, preservative treated and correct size to create cavity?	✓
Are the batten fixings suitable for the batten and the structure behind?	✓
Are the battens lined and levelled with robust packing approved by batten engineer?	✓
Has anticipated movement within the structure been allowed for in the design of the facade?	✓
Are Multi-Rend Sheets secured to battens with approved fixings? (as per our page 5 info)	✓
Has the Render Company approved the use of the Multi-Rend boards?	✓
If the boards have been exposed to the elements for any number of days prior to rendering it is compulsory to brush the surface of the boards down with a stiff brush, to remove any salts that may of risen to the surface.	✓

Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Technical Data



Thermal Insulation Properties



Rodent Resistant



Low Carbon Manufacturing Process



Fire rated, Non-Flammable
A1 Non-Combustible



Impact Resistant



Moisture & Water Resistant

Test Subject

Test

Result

Density Dry (ex works)		1050 kg/m ³ (+/- 10%)
Modulus of Rupture	BSEN 310	17.7 N/mm ² (along grain) 12.4 N/mm ² (across grain)
Modulus of Elasticity	BSEN 310	6415 N/mm ²
Impact Strength (Brinell)		34 N/mm ²
Vapour Resistance	BSEN 12086:1997	3.8 MNs/g
Thermal Conductivity at 50 ⁰		0.307 W/mK
Fire Test	EN 13501-1:2007 + A1:2009	Class A1 Non-Combustible
Change in Thickness (After immersion in water)	BSEN 317	0-0.1% N/mm ²
Tensile Strength (perpendicular to plane)	BSEN 319	2.004 N/mm ²
Screw Withdrawal Strength (with timber)	BSEN 320	2.60kN
Pull through resistance	BS EN 1383 : 199	1.371 kN
Average Thickness Swelling	BSEN 321	0
Average Tensile Strength	BSEN 321	2.04 N/mm ²
Moisture Content	BSEN 322	8.6%

Dimensions

Resistant Multi-Rend is supplied as a rectangular board with square edges and is white in colour.

Thickness: 9-12mm

Sizes: 1200 x 2400mm

Special size requirements and thicknesses are also available upon request depending on quantity.

Manufacture

Resistant Multi-Rend is manufactured using inorganic substances, and an alkaline resistant fibreglass mesh. Why alkaline resistant - because MgO products have a slightly alkaline pH Value and durability is assured with highest grade alkaline resistant mesh.

The product is naturally cured using no energy through cold fusion, unlike similar competitive products on the market, which use autoclaving technology. This ensures that Resistant Multi-Rend has a relatively low impact on the market environment.

Multi-Rend achieves its superior strength and flexibility by the introduction of four layers of alkaline-resistant fibreglass mesh. Consistent high quality of the product of the product is maintained and monitored through a sophisticated digitally controlled process to ensure a superior finished board always reaches our commitment to quality assurance.

Multi-Rend board must be dry, clean & free from dust etc before a render is applied to the board

Tolerances

Length and Width: +/- 2mm

Thickness: 9mm = +/- 0.34mm
12mm = +/- 0.15mm

Edge Straightness: 1mm / metre

Squareness of edge: < 3mm

Boards Tested By



Download the complete BBA certificate at www.resistant.co.uk for full details



EJOT® The Quality Connection



bre



Queen's University Belfast



ce:ram



Correct Storage / Handling



from the ground on a pallet, in dry conditions indoors and be under cover. Boards should not be leant upright for long periods of time.



Boards should always be lifted by two people and not dragged across each other to prevent unnecessary scratching or damage.



sheets will cause permanent surface staining. They should be protected from the weather and other trades on site at all times.



Boards should be carried on edge and extra precaution should be taken to protect the visible front edge and corners.

Accessories will commonly be available from all good Render Suppliers and Builders Merchants

Useful Contact Information

Ejot UK Ltd,
Hurricane Close
Sherburn-in-Elmet
Leeds
LS25 6PB

Call: +44 (0)197 768 7040
Fax: +44 (0)197 768 7041
Email: info@ejot.co.uk
www.ejot.co.uk

Evolution Fasteners
Units 2A & 2B
Clyde Gateway Trade Park
Rutherglen, Glasgow
G73 1AE

Call: +44 (0)141 647 7100
Fax: +44 (0)141 647 5100
Email: sales@evolutionfasteners.co.uk
www.evolutionfasteners.co.uk


Mainline Products UK Ltd,
Unit 3b, Aspect Court
Cannel Row,
Silverdale Enterprise Park
Newcastle under Lynne
Staffordshire, ST5 6SS

Call: +44 (0)845 345 7095
Email: sales@mainlineproducts.co.uk
www.mainlineproducts.co.uk

Wemico
Matthew Lane,
Hoo Farm
Industrial Estate
Kidderminster, Worcs.
DY11 7RA

Call: +44 (0)156 282 0123
Fax: +44 (0)156 282 2012
Email: sales@wemico.co.uk
www.wemico.com

RESISTANT SALES MAP

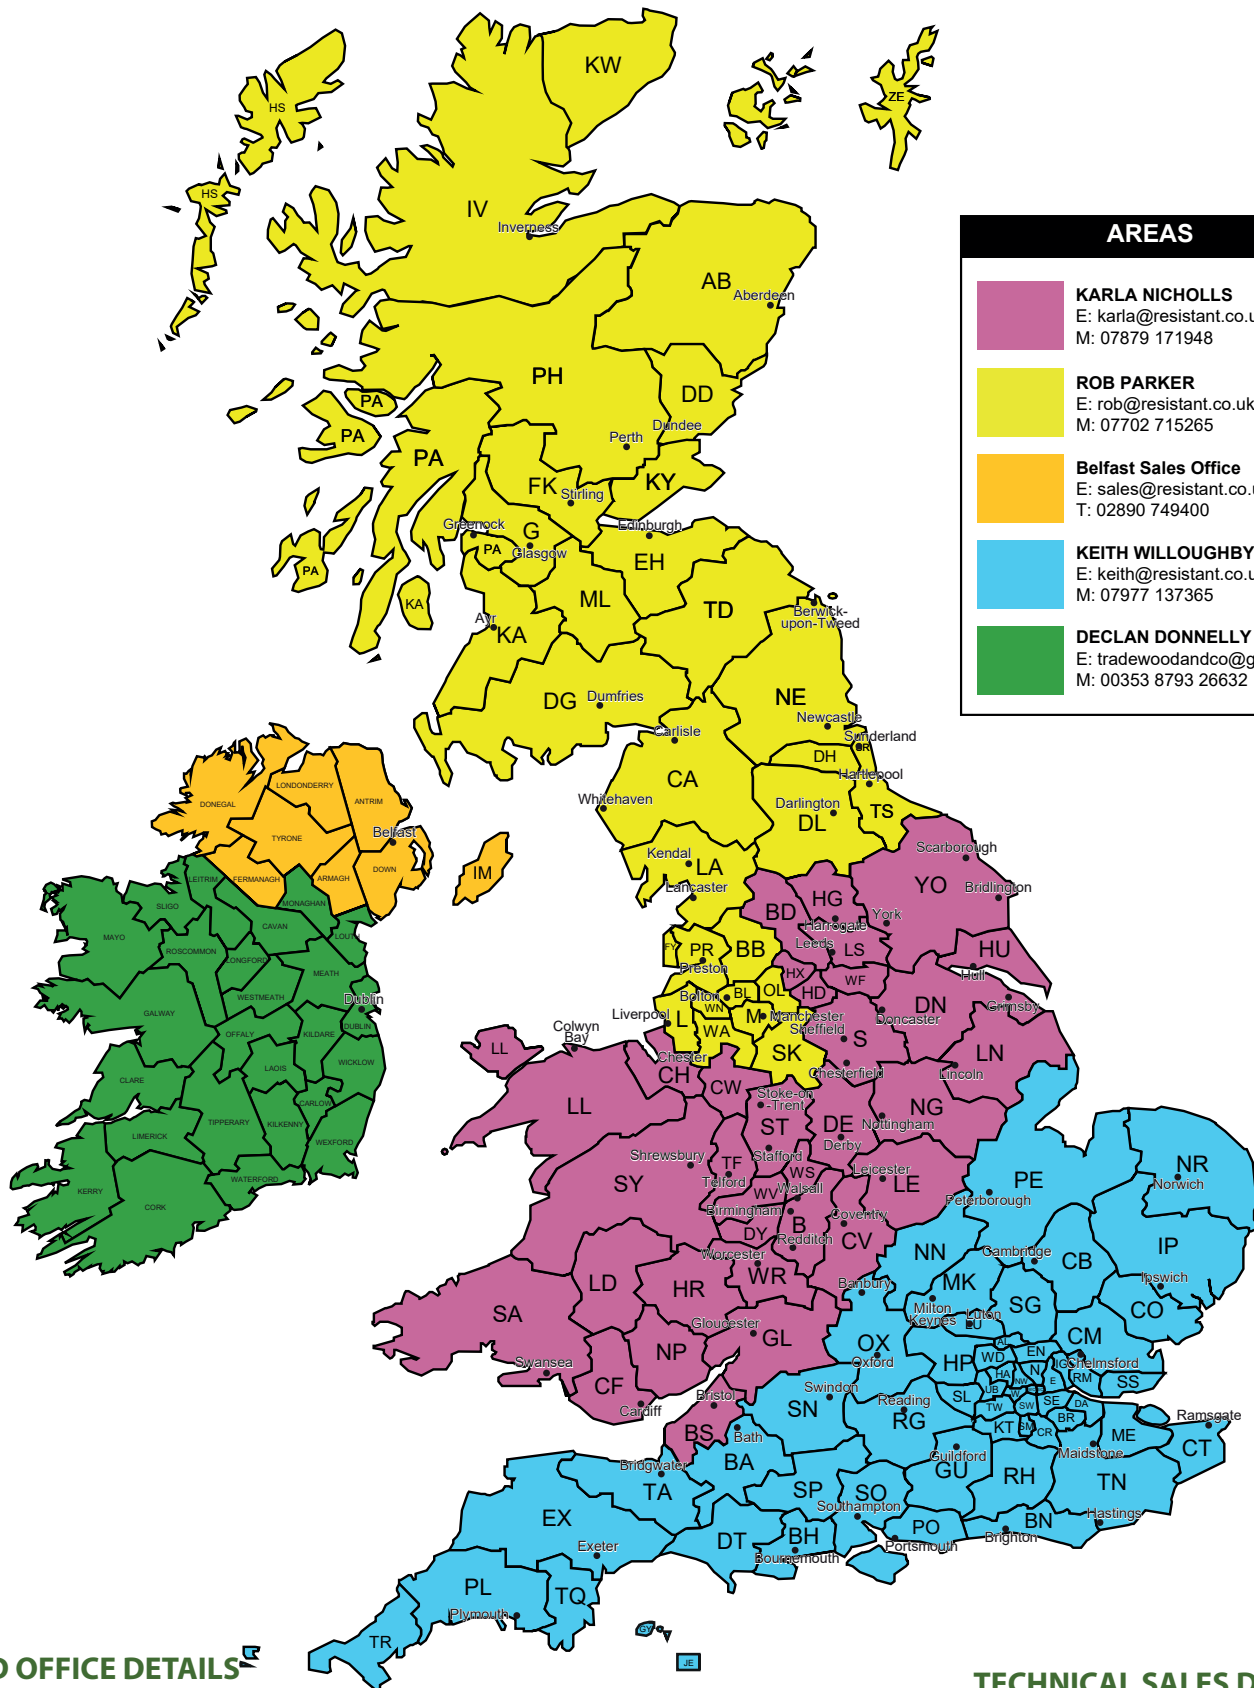

AREAS	
	KARLA NICHOLLS E: karla@resistant.co.uk M: 07879 171948
	ROB PARKER E: rob@resistant.co.uk M: 07702 715265
	Belfast Sales Office E: sales@resistant.co.uk T: 02890 749400
	KEITH WILLOUGHBY E: keith@resistant.co.uk M: 07977 137365
	DECLAN DONNELLY E: tradewoodandco@gmail.com M: 00353 8793 26632

HEAD OFFICE DETAILS
 Resistant Building Products
 7 Duncrue Place
 Belfast
 BT3 7BU
www.resistant.co.uk
 +44 (0) 28 9074 9400

TECHNICAL SALES DIRECTOR
 Martin Braithwaite
martin@resistant.co.uk
 07720 736757