



CADCO

P V C P R O D U C T S

PVC Plaster Beading



www.cadconi.com



Cadco PVC products sets new quality standards with its range of PVC plaster beading. Our quality beads systems are aligned with exacting European demands, yet fully geared around the sustainable and responsible. We are one of Ireland's leading suppliers of uPVC products, our range performs better and makes life easier for end-users. Made, where possible using recycled materials, Cadco PVC products helps buyers demonstrate compliance with environmental purchasing.

Plastic Plaster Beading Fit for Purpose

Cadco beading is built to perform. Exceeding the quality standards of normal plastic beading. Cadco is made from the highest-grade post-industrial material. And it's from here Cadco derives its unique strength and inherent quality.

The result:

A tough, stable plastic bead – resistant to corrosion and well able to withstand the rigours of handling throughout the supply chain.

Tough yet sustainable

A tough performing product, the benefits of Cadco beading stretch further. They provide a solution to the environmental purchasing and compliance issues now facing European buyers. In the manufacture of, substantial landfill and CO2 reductions can be achieved. Consider this. Compared to galvanised beading, 1 tonne of Cadco can yield almost 2 tonnes less CO2.

Designed for users

Precision designed with users in mind, Cadco removes install issues. Its unique arrangement of punched holes provides an highly accurate cutting guide – resulting in faster, more accurate 45o mitre jointing. This speeds fitting, saves time and even provides for the novice installer.

When finish matters

Cadco strength and versatility match well its finer design points. This raised aris is a unique Cadco feature which helps installers apply surface finish to an exact, crisp point. This is critical. It makes for a stronger bond around windows and doors where movement is expected and therefore reduces call back.

Cadco

Designed for flexibility

Cadco removes the frustrations of external colour coding. When coloured exterior render is specified, Cadco exterior plaster beading can be exactly colour matched. This dramatically improves the visible end result and excludes the need for complicated paint finishing.

Cadco

Minimum carbon mileage

On Europe's doorstep, Cadco sustainable sourcing is just the start. Collaboration with national transport partners yields a vastly reduced Reduce carbon mileage. This challenges the value of distant overseas sourcing, and yields more benefit to buyers measured on eco-compliance.

Cadco

Suitable for ICF

With the advent of Insulated Concrete Formwork (ICF) building materials, Cadco fibre mesh combats both structural and insulation issues. Fibre mesh reinforces exposed corners and areas prone to movement by bonding into one, the formwork, beading and exterior render. Once more, a stronger, harder working finish – protected from cracking or failure.

Cadco

Compliance

Cadco complies with:
European Building Regulations
International Quality Systems
ISO 9001:2000

Perfect 45° Angles with a unique guide cutline



Perfect 45° Cut




Our unique Plaster Beading features 45° punched holes for easy and fast mitre cutting

Product Data

Angle Beading


AB2A

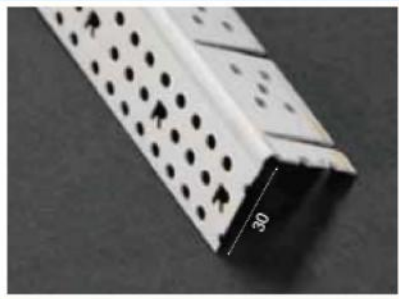

The unique design of the Arch Bead ensures a sharper, more profound definition is achieved. Arch Beads have been designed with adequate flexibility to form tight radiuses.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.200mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1cm)
Quantity per Pack	20 Lengths per Box


AB2

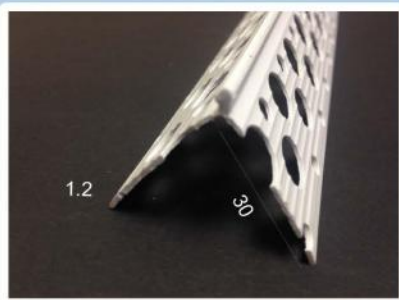

Standard Arch Bead providing impact protection in corners \geq 2mm. The unique graduated punch holes allow for accurate cutting at 45°. This feature ensures precise fixings at reveals and corners.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.200mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1cm)
Quantity per Pack	25 Lengths per Box


MB50

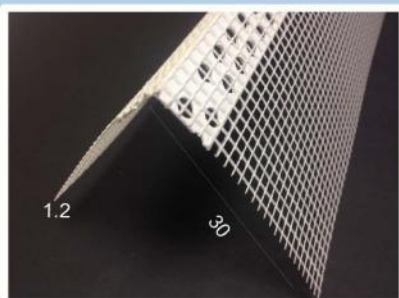

Nose less fibre Meshed Angle Beads, used in conjunction with external wall insulation façade systems and also to create corners for internal plastering. The unique graduated punch holes allow for accurate 45° cutting. Provides precise fixings at reveals, corners etc.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.200mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	150mm * 100mm mesh showing
Colour	White
Profile Length	260, 300cm (± 1cm)
Quantity per Pack	50 Lengths per Box


AB4

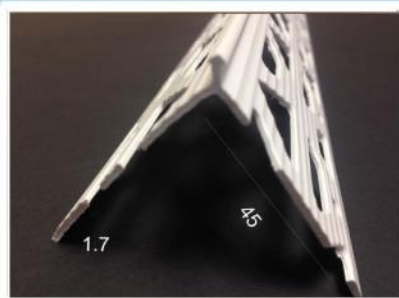

Standard Angle Bead providing impact protection on corners \geq 4mm.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.200mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1cm)
Quantity per Pack	25 Lengths per Box


AB6

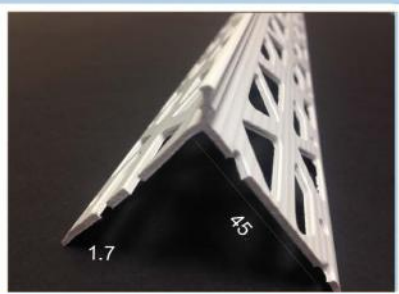

Standard Angle Bead providing impact protection on corners \geq 6 mm.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.700mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1cm)
Quantity per Pack	25 Lengths per Box


AB8

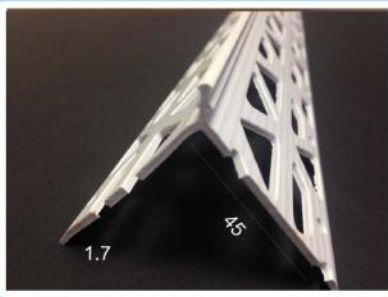

Standard Angle Bead
providing impact protection on
corners ≥ 8 mm.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.700mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1 cm)
Quantity per Pack	25 Lengths per Box


AB10

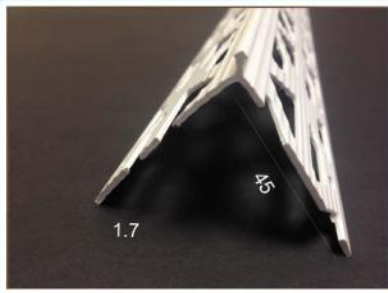

Standard Angle Bead
providing impact protection on
corners ≥ 10 mm.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.700mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1 cm)
Quantity per Pack	25 Lengths per Box


AB15

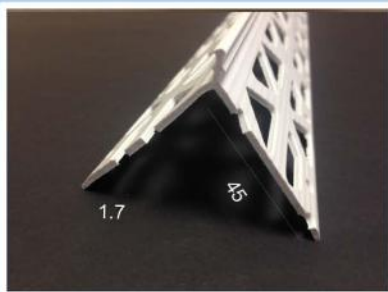

Standard Angle Bead
providing impact protection on
corners ≥ 15 mm.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.200mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm (± 1 cm)
Quantity per Pack	25 Lengths per Box


EX10

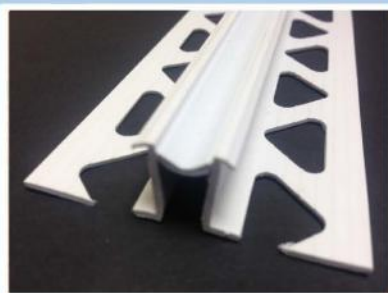

Standard Angle Bead
providing impact protection on
corners ≥ 4 mm.

Profile Material	PVC-U <small>Expansion movement joint for plaster and render</small>
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	-
Quantity per Pack	-

EX15

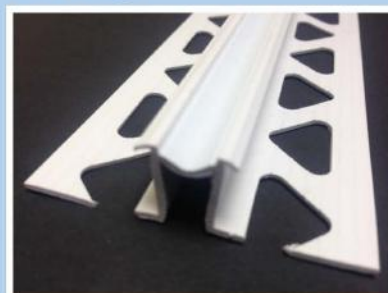


Standard Angle Bead
providing impact protection on
corners ≥ 6 mm.

Profile Material	PVC-U <small>Expansion movement joint for plaster and render</small>
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	-
Quantity per Pack	-

Product Data

Stop Beading


SB2

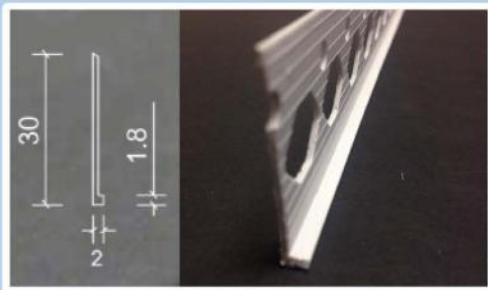

Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 2\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	0.800mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


SB4

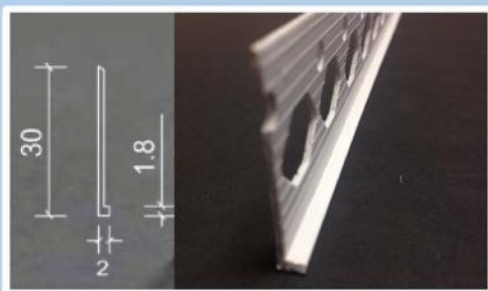

Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 4\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.000mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


SB6

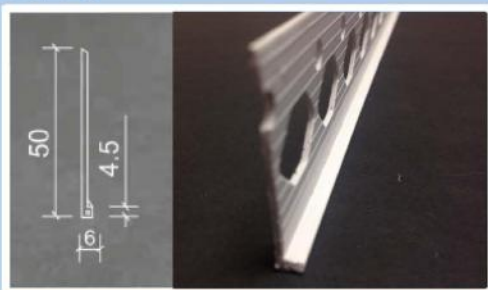

Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 6\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.800mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


SB8

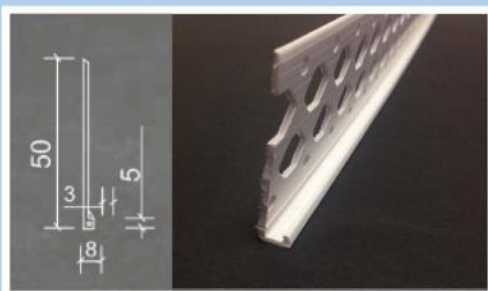

Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 8\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.800mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box

SB10

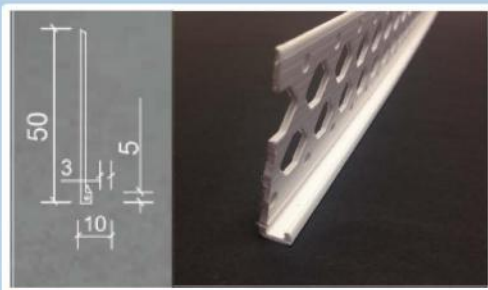


Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 10\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.700mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box

Product Data

Stop Beading and Bellcast Drip Beading


SB15

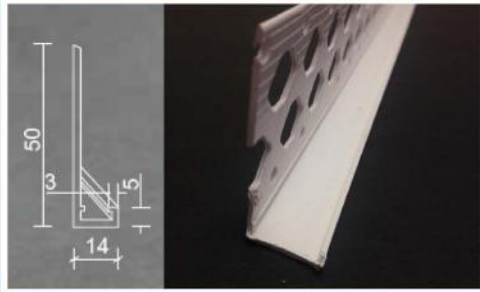

Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 14\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.800mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


SB20

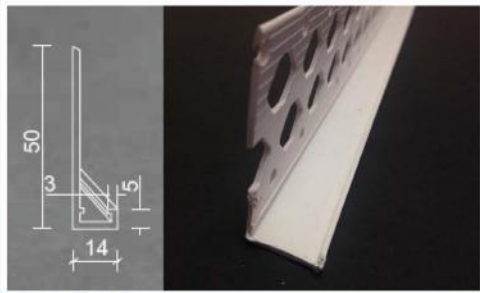

Stop Beads are used at junctions of walls, ceilings and surrounds to openings i.e. windows and doors. They are designed to finish and protect render and plaster edges $\geq 14\text{mm}$.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.800mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


BC6

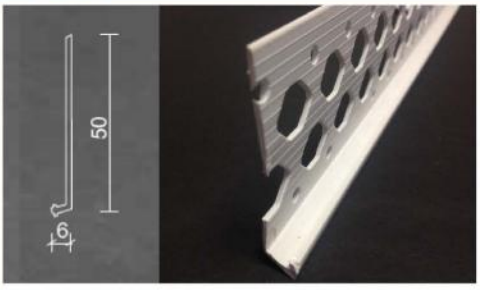

The Bellcast drip bead forms and protects the lower edge of render either at DPC, above a window opening or at a door opening ($\geq 6\text{mm}$)

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.300mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


BC10

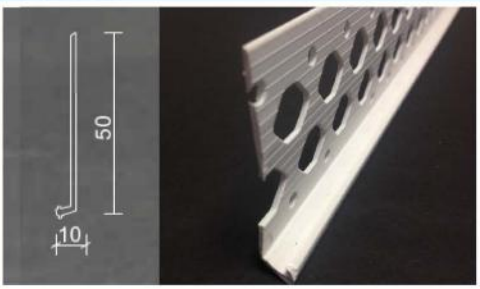

The Bellcast drip bead forms and protects the lower edge of render either at DPC, above a window opening or at a door opening ($\geq 10\text{mm}$)

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.300mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


BC15

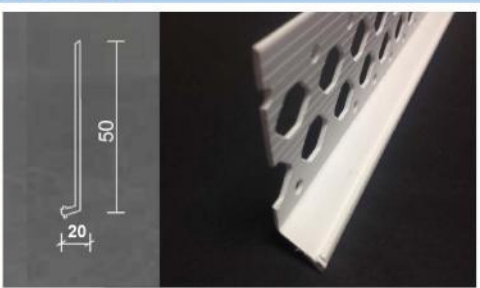

The Bellcast drip bead forms and protects the lower edge of render either at DPC, above a window opening or at a door opening ($\geq 14\text{mm}$)

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.300mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box


BC20

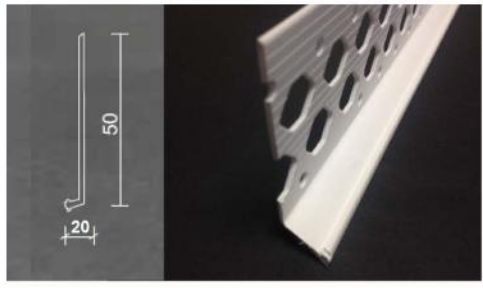

The Bellcast drip bead forms and protects the lower edge of render either at DPC, above a window opening or at a door opening ($\geq 14\text{mm}$)

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	1.300mm
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	260, 300cm ($\pm 1\text{cm}$)
Quantity per Pack	25 Lengths per Box

SB06 Mesh Stopbead

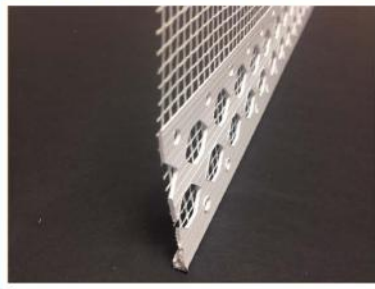

Nose less fibre Meshed Beads, used in conjunction with external wall insulation façade systems and also to create corners for internal plastering. The unique graduated punch holes allow for accurate 45° cutting. Provides precise fixings at reveals, corners etc.

Profile Material	PVC-U
Achievability	DIN EN ISO 1163-1/BS EN607
Material Thickness	
General Tolerances of Size, Form and Orientation	DIN 16941
Standard	-
Colour	White
Profile Length	-
Quantity per Pack	-

Lisnaskea

No. 4 Drumbrughas Ave, Drumbrughas North,
Lisnaskea, Co.Fermanagh, N.Ireland, BT92 0QQ
Tel:028 677 22217 (from NI & GB)
+44 28 67 22217 (from Ireland)

Dublin

Unit 18F Rosemount Park Drive, Rosemount
Business Park, Blanchardstown, Dublin 15
Tel: 01 885 3801 (from Ireland)
+353 21 885 3801

Cork

Unit 16 Northpoint Business Park, Mallow Road,
Co.Cork
Tel:021 421 2023 (from Ireland)
+353 21 4212023 (from NI & GB)