





multiPANEL

the collection

The ideal solution for waterproof walls, floors & ceilings

Specifications



[CLICK ON AN OPTION BELOW:](#)

[multiPANEL](#) ◀

[tilePANEL](#) ◀

[ceilingPANEL](#) ◀

[twinFLOOR](#) ◀

[cleanPANEL](#) ◀

Contents

multiPANEL
the luxury alternative to tiling

CONTENTS

multiPANEL wall panels are constructed with a hardwood waterproof plywood core bonded under controlled conditions with a high pressure decorative laminate to face, and a plain balancing laminate to rear. Waterproof gluelines are D4 rated. All work is carried out to BS EN ISO 9001:2008 or client's specifications.

multiPANEL hydro-lock joints

Our standard details for jointing two panels together, without using aluminium extrusions, is hydro-lock. This produces a watertight, subtle joint that is quick and easy to install.



Size/Weight

2400 x 1200 x 11mm / Approx 22KG

2400 x 900 x 11mm / Approx 16.5KG


2400 x 598 x 11mm / Approx 11KG

The panels can be cut to size if required

Colours 30 colours are available to order from stock.

Accessories

multiPANEL aluminium edge profiles 2.5m long are available in five profiles and five finishes:

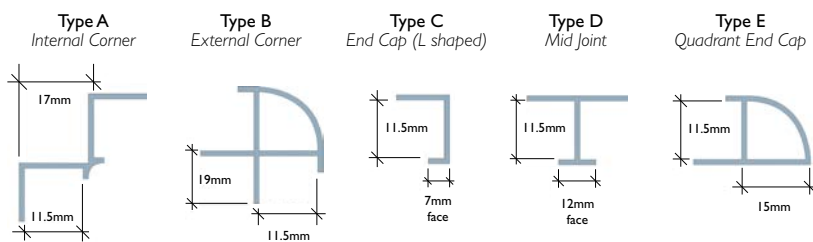

Metal sections are available in Satin Anodised Silver and Gold, White, Black and Polished Aluminium finishes.

multipanel seal is a 2 part sealing kit for shower trays & baths

multipanel access is an all in one kit allowing you access to services through a Multipanel wall panel.

multiPANEL
the luxury alternative to tiling

CONTENTS

Cleaning

The panels should be cleaned using warm water and a non abrasive mild detergent (not bleach). Scouring products or powders should not be used.

Precautions

When cutting or trimming the boards sharp edges may be encountered which should be smoothed off using sandpaper or plane. Aluminium cutting should be carried out using appropriate metal cutting tools such as a hack saw and de-burred. Appropriate eye protection should always be worn. When disposed of, the panels are suitable for landfill with no leaching or environmental pollution considerations associated with the product.

Fire Rating

multiPANEL has an equivalent to class 2 fire rating. The laminate used in multiPANEL is not fire rated, but FR laminate is available as a special order (standard colours may not be available FR). Even when FR laminate is used, because it is bonded to plywood, the end product does not come with a certificate of fire resistance. We can only supply a surface spread of flame for the face laminate.

Thermal Properties

- **Dry Heat** For short periods, multiPANEL will withstand surface temperatures of up to 180°C (356°F) to Grade 5 without deterioration of surface or colour (although in some cases a slight loss of sheen may occur). Avoid continuous localised heat. If used in situations of localised heat, such as adjacent to ovens, the maximum temperature to which the panel should be subjected to for long periods (up to 8 hours) is 100°C. In applications, such as use in fire surrounds, panels are subjected to direct heat more or less continuously. In such cases we would not recommend the use of multiPANEL.
- **Resistance to Cigarette Burns** multiPANEL has a resistance rating of 4 (Min 3) to damage by lit cigarettes, and will normally only suffer a loss of sheen and/or slight to moderate brown staining. Excessive localised heating can result in blistering of laminate surface.
- **Resistance to Boiling Water** Being resistant to steam and boiling water, multiPANEL is ideal for applications where cleanliness and hygiene are important.
- **Resistance to Cold** multiPANEL is unaffected by extreme dry cold and cold storage conditions.
- **Chemical Resistance** multiPANEL has been used widely and satisfactorily for many years in medical and industrial sites. multiPANEL meets the requirements of EN 438 at level 5, which specifies resistance to staining by 49 substances in every day use.
- **Wear Resistance** 450 revolutions.

tilePANEL
tile effects in waterproof walls

CONTENTS

tilePANEL wall panels consist of compact grade laminate, made from a core layer impregnated with phenolic resin and double sided surfaces layers impregnated with melamine resin. Manufacture is carried out to BS EN 438.

Size/Weight

- 2440 x 1220 x 3mm / Approx 14kg
- 2440 x 900 x 3mm / Approx 10.5kg
- 2440 x 600 x 3mm / Approx 7kg

Thickness Tolerance	+/- 0,3mm
Length/Width Tolerance	+10mm/ -0mm
Warping Tolerance	+/- 12mm warping per metre
Tile Tolerance	+/- 15mm per panel length


The panels can be cut to size if required.

Colours 10 colours are available to order from stock, in 2 tile sizes and finishes

Tile Size/Finish -	Mosaic - approx 22mmx 22mm gloss finish
	Mosaic - approx 44mmx 44mm matt finish

Accessories

Tilepanel aluminium edge profiles 2.5m long are available in four profiles, and in four finishes:

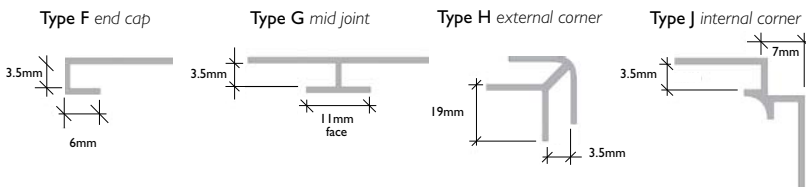

metal sections are available in Satin Anodised Silver ,White, Black and Polished Aluminium finishes.

Cleaning

The panels should be cleaned using warm water and a non-abrasive mild detergent (not bleach). Scouring products or powders should not be used. See separate cleaning chart for more detailed information.



Precautions

When cutting or trimming the boards sharp edges may be encountered which should be smoothed off using sandpaper or a plane. Aluminium cutting should be carried out using appropriate metal cutting tools such as a hack saw and de-burred. Appropriate eye protection should always be worn. When disposed of, the panels are suitable for landfill with no leaching or environmental pollution considerations associated with the product.

Fire Rating

As standard tilepanel has a class 2 surface spread of flame fire rating. Class 1 is available to order, for longer contracts please note there is a larger lead time for this.

Thermal Properties

Dry Heat

For short periods, tilepanel will withstand surface temperatures of up to 180°C (356°F) to Grade 4, without deterioration of surface or colour (although in some cases a slight loss of sheen may occur). Avoid continuous localised heat. If used in situations of localised heat, such as adjacent to ovens, the maximum temperature to which the panel should be subjected to for long periods (up to 8 hours) is 100°C. In applications, such as use in fire surrounds, panels are subjected to direct heat more or less continuously. In such cases we would not recommend the use of tilepanel.

Resistance to cigarette burns

tilepanel has a resistance rating of 4 (Min 3) to damage by lit cigarettes, and will normally only suffer a loss of sheen and/or slight to moderate brown staining. Excessive localised heating can result in blistering of laminate surface.

Resistance to boiling water

When immersed in boiling water for 2 hours, a maximum mass increase and thickness increase of 4% will occur.

Resistance to Cold

Tilepanel is unaffected by extreme dry cold and cold storage conditions.

Chemical Resistance

Tilepanel has been widely and satisfactorily used for many years in medical and industrial sites. Tilepanel easily meets the requirements of EN 438 test method 15, which specifies resistance to staining by 49 substances in every day use.

Wear Resistance

350 revolutions.

ceiling**PANEL**

the light and easy PVC ceiling

ceiling**PANEL** is made from 8mm PVC with a decorative face. All panels have a tongue and grooved long edge.


Size/Weight

Panel Size	2700 x 250 x 8mm
Panels/pack	4
Pack Coverage	2.7m ²
Pack Weight	9.72kg

Colours 6 decors are available to order from stock

Accessories

ceiling**PANEL** PVC edge profiles 2.7m long are available in six profiles and two finishes:

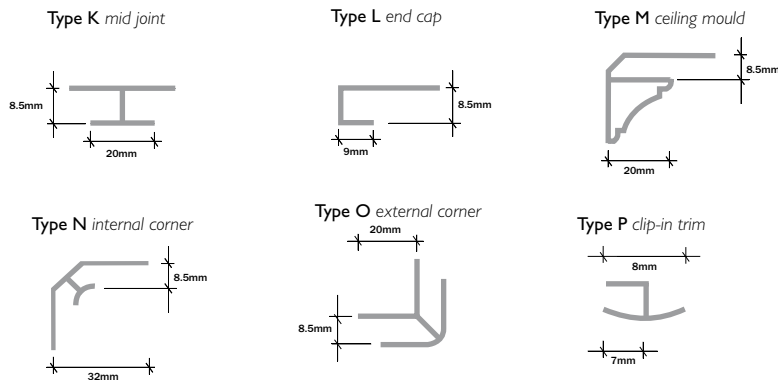

Profiles are available in bright silver and white. (Type P only available in silver) Type M in silver is supplied with two narrow silver strips above and below the white cove profile.

Cleaning

The panels should be cleaned using warm water and a non abrasive mild detergent (not bleach). Scouring products or powders should not be used.

Fire Rating

Ceilingpanel carries a class I surface spread of flame fire rating.



CONTENTS

twin**FLOOR** is a waterproof, interlocking vinyl flooring range which consists of one decorative layer of vinyl bonded to a vinyl underlayer, both with overlapping gluestrips for easy assembly. Manufactured to EN 14041: 2004

	twin FLOOR Tiles	twin FLOOR Planks
Unit Size	914 x 304 x 3.8mm	914 x 152 x 3.8mm
Units/pack	8	16
Pack Coverage	2.23m ²	2.23m ²
Weight	17kg	17kg

- Colours** 5 tile and 5 wood plank decors are available to order from stock.
- Wear Layer** 0.3mm
- Surface** Aluminium Oxide abrasive coating
- Slip Resistance** DIN 51130 - R10
- Sound Reduction** DIN 55210 8db
- Fire Rating** BS476, Part 7 Class 2 EN ISO 9239 - I
Class B, BS EN 13501 - 112002 B -s1
- Adhesive** Petroleum Pressure Sensitive adhesive is used on the gluestrips
- Water Tightness** When submerged under 30mm water for 24 hours twin**FLOOR** meets EN 649 requirements.
- Chemical Resistance** twin**FLOOR** exceeds EN 423:1993
- Residual Indentation** twin**FLOOR** exceeds EN 433:1994
- Accessories**
 - twin**FLOOR** Tape is available for repair and replacements.
 - twin**FLOOR** Polish and Cleaner is a 2-in-1 solution for protection and cleanliness
 - twin**FLOOR** self-adhesive felt pads for furniture to prevent scratching
 - twin**FLOOR** rollers, to ensure the GlueStrips fully adhere to one another

The above items are all available in one homecare kit

cleanPANEL
the extra height solution for hygienic walls

CONTENTS

cleanPANEL wall panels consist of compact grade laminate, made from a core layer impregnated with phenolic resin and double sided surfaces layers impregnated with melamine resin. Manufacture is carried out to BS EN 438.

Size/Weight

3050 x 1220 x 3mm / Approx 17.5kg

3050 x 900 x 3mm / Approx 13kg

3050 x 600 x 3mm / Approx 8.75kg

Thickness Tolerance = +/- 0.3mm

Length/Width Tolerance = +10mm/ -0mm


Warping Tolerance = +/- 12mm warping per metre

The panels can be cut to size if required

Colours cleanPANEL is available from stock in 2 colours, on one double-sided panel

Accessories

cleanPANEL aluminium edge profiles 3050mm long are available in four profiles, and in two finishes:

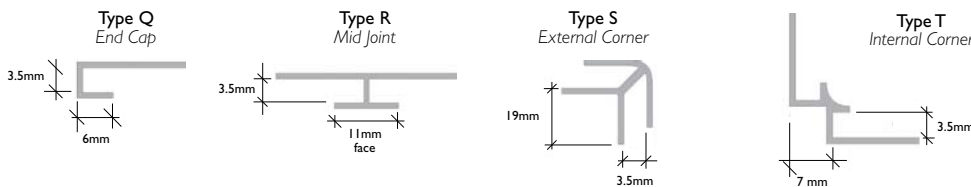

Metal sections are available in 2 finishes, White and Satin Anodised Silver.

cleanPANEL
the extra height solution for hygienic walls

CONTENTS

Cleaning

The panels should be cleaned using warm water and a non-abrasive mild detergent (not bleach). Scouring products or powders should not be used. See separate cleaning chart for more detailed information.

Precautions

When cutting or trimming the boards sharp edges may be encountered which should be smoothed off using sandpaper or plane. Aluminium cutting should be carried out using appropriate metal cutting tools such as a hack saw and de-burred. Appropriate eye protection should always be worn. When disposed of, the panels are suitable for landfill with no leaching or environmental pollution considerations associated with the product.

Fire Rating

As standard cleanPANEL has a class I surface spread of flame fire rating.

Thermal Properties

- **Dry Heat** For short periods, cleanPANEL will withstand surface temperatures of up to 180°C (356°F) to Grade 4, without deterioration of surface or colour (although in some cases a slight loss of sheen may occur). Avoid continuous localised heat. If used in situations of localised heat, such as adjacent to ovens, the maximum temperature to which the panel should be subjected to for long periods (up to 8 hours) is 100°C. In applications, such as use in fire surrounds, panels are subjected to direct heat more or less continuously. In such cases we would not recommend the use of cleanPANEL.
- **Resistance to Cigarette Burns** cleanPANEL has a resistance rating of 4 (Min 3) to damage by lit cigarettes, and will normally only suffer a loss of sheen and/or slight to moderate brown staining. Excessive localised heating can result in blistering of laminate surface.
- **Resistance to Boiling Water** When immersed in boiling water for 2 hours, a maximum mass increase and thickness increase of 4% will occur.
- **Resistance to Cold** cleanPANEL is unaffected by extreme dry cold and cold storage conditions.
- **Chemical Resistance** cleanPANEL has been widely and satisfactorily used for many years in medical and industrial sites. cleanPANEL easily meets the requirements of EN 438, which specifies resistance to staining by 49 substances in every day use.
- **Wear Resistance** 350 revolutions.