




CHERRY PIPES

60 mm Land Drainage Pipe Specification BS 4962

Pipe Wall Profile

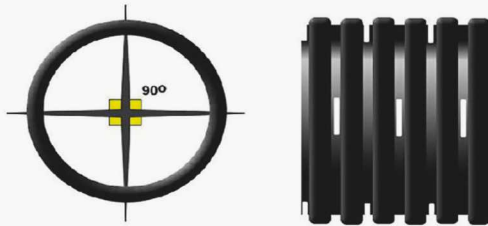

Material: High Density Polyethylene (HDPE)

Colour: Black

Dimensions	mm	in
Pitch	8.26	0.325
Profile Height	4.71	0.185
Inside Diameter	50.65	1.994
Outside Diameter	60.06	2.365

Design Values	
Ring Stiffness	> 7 KN/m ²
Material Density	0.96g/cm ³
Minimum Bend Radius	1m

Perforations	mm	in
Length	15	0.591
Thickness	2	0.079

Pipe Perforated in a 2 x 2 offset pattern

Available Lengths:

50 m

150 m






CHERRY PIPES

80 mm Land Drainage Pipe Specification BS 4962

Pipe Wall Profile

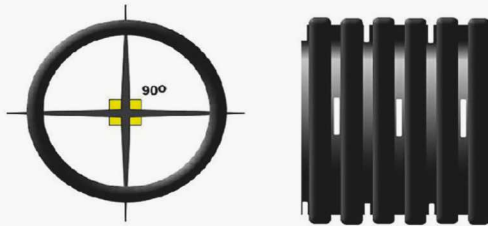

Material: High Density Polyethylene (HDPE)

Colour: Black

Dimensions	mm	in
Pitch	11.01	0.433
Profile Height	6.25	0.246
Inside Diameter	67.51	2.658
Outside Diameter	80.01	3.150

Design Values	
Ring Stiffness	> 6 KN/m ²
Material Density	0.96g/cm ³
Minimum Bend Radius	1m

Perforations	mm	in
Length	15	0.591
Thickness	2	0.079

Pipe Perforated 4 in every well

Available Lengths:

- 25 m
- 50 m
- 100 m






CHERRY PIPES

100 mm Land Drainage Pipe Specification BS 4962

Pipe Wall Profile

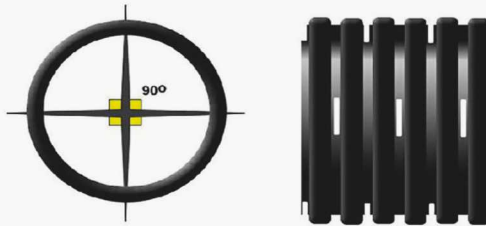

Material: High Density Polyethylene (HDPE)

Colour: Black

Dimensions	mm	in
Pitch	14.15	0.557
Profile Height	7.39	0.291
Inside Diameter	85.25	3.356
Outside Diameter	100.04	3.939

Design Values	
Ring Stiffness	> 5 KN/m ²
Material Density	0.96g/cm ³
Minimum Bend Radius	1m

Perforations	mm	in
Length	15	0.591
Thickness	2	0.079

Pipe Perforated in a 2 x 2 offset pattern

Available Lengths:

- 25 m
- 50 m
- 100 m






CHERRY PIPES

160 mm Land Drainage Pipe Specification BS 4962

Pipe Wall Profile

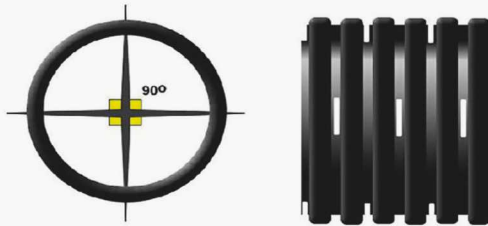

Material: High Density Polyethylene (HDPE)

Colour: Black

Dimensions	mm	in
Pitch	16.51	0.650
Profile Height	10.71	0.422
Inside Diameter	138.58	5.456
Outside Diameter	160.00	6.299

Design Values	
Ring Stiffness	> 4 KN/m ²
Material Density	0.96g/cm ³
Minimum Bend Radius	1m

Perforations	mm	in
Length	15	0.591
Thickness	2	0.079

Pipe Perforated in a 2 x 2 offset pattern

Available Lengths:

35 m

