

# Tegula

timeless elegance

- Processed to give an aged, antique appearance
- Vibrant long-lasting colours
- Evokes timeless style and elegance
- Suitable for both modern or traditional projects


Other versions available:



## product specifications

<b>Product type</b>	Concrete Paving Block
<b>Manufactured to</b>	BS EN 1338:2003
<b>Surface Finish</b>	Processed to give an aged appearance
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	Typical tensile splitting strength of >3.6MPa
<b>Slip/Skid risk</b>	Extremely Low
<b>Installed to</b>	BS 7533-3:2005
<b>BS</b>	<b>Plus:</b> Q24 110 <b>Create:</b> 45-20-64/400
<b>Applications</b>	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 10% (all colours except Natural, Golden & Slate)
<b>Carbon Footprint</b>	<b>50mm:</b> 18kgCo <sup>2</sup> e/m <sup>2</sup> <b>60mm:</b> 24kgCo <sup>2</sup> e/m <sup>2</sup> <b>80mm:</b> 32kgCo <sup>2</sup> e/m <sup>2</sup>
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breem rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>50/60mm:</b> <b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved when used in conjunction with a prepared recycled sub-base. <b>80mm:</b> <b>B</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A</b> , can be achieved when used in conjunction with a prepared recycled sub-base.
Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality system. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BS EN ISO 14021:2016 and BES 6001.	

## colours

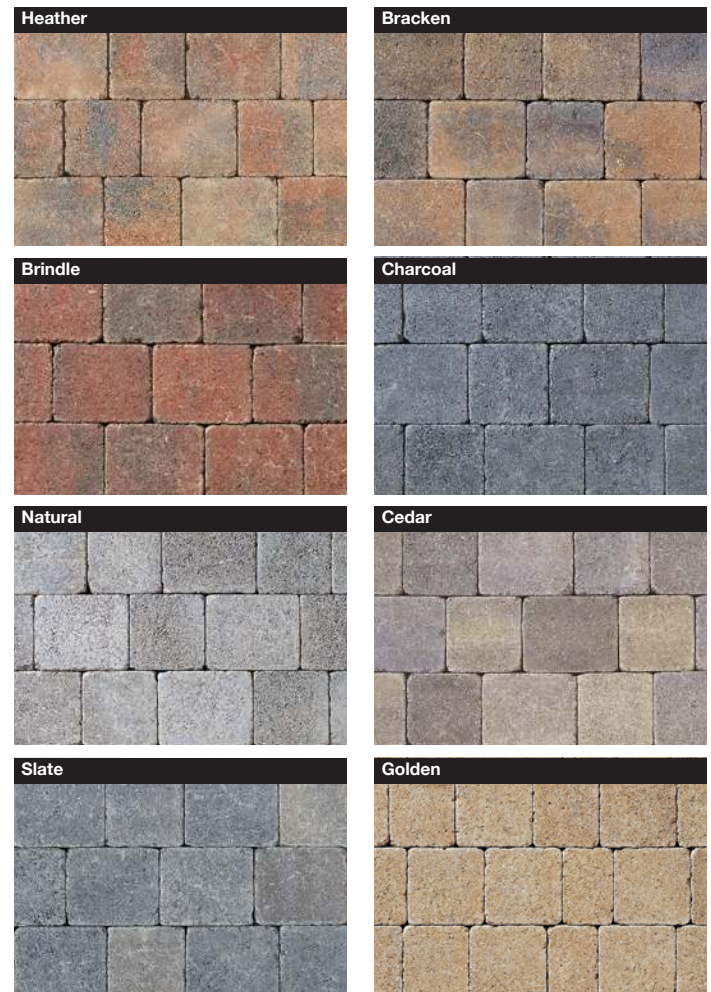

product	size (mm)	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight (kg) per pack
TEGULA 50mm [void pack]	175 x 140 x 50	Bracken, Cedar, Charcoal, Heather, Slate	YES	12.79	1.03	40.82	522	1429
TEGULA 50mm [pallet]	140 x 140 x 50	Bracken, Cedar, Charcoal, Heather, Slate	YES	13.77	1.53	51	702	1550
TEGULA TRIO 50mm [void pack] (all three sizes in one pack)	197 x 173 x 50 173 x 173 x 50 130 x 173 x 50	Bracken, Brindle, Cedar, Charcoal, Golden, Heather, Slate	YES	13.05	1.05	33.3	174 174 87	1453
TEGULA 60mm	208 x 173 x 60 173 x 173 x 60	Bracken, Cedar, Charcoal, Heather, Natural, Slate Bracken, Cedar, Charcoal, Heather, Natural, Slate	YES YES	12.95 12.56	2.16 1.79	27.79 33.41	360 420	1810 1743
TEGULA TRIO 60mm ML BIM (all three sizes in one pack)	208 x 173 x 60 173 x 173 x 60 138 x 173 x 60	Bracken, Cedar, Charcoal, Heather, Slate	YES	10.5	1.05	33.3	120 110 120	1475
TEGULA 80mm	240 x 160 x 80 208 x 173 x 80 173 x 173 x 80 104 x 173 x 80	Bracken, Cedar, Charcoal, Heather, Slate Bracken, Cedar, Charcoal, Heather, Natural, Slate Bracken, Cedar, Charcoal, Heather, Natural, Slate Bracken, Cedar, Charcoal, Heather, Natural, Slate	YES YES YES YES	9.6 9.72 9.43 9.07	1.92 1.62 1.35 1.3	26.03 27.79 33.41 55.58	250 270 315 504	1748 1770 1717 1628

ML This product can be hand or machine laid. BIM This product is available to download from our website in BIM Level 2 format.

Refer to all instructions and warnings on our website